


 Engine Governing Systems	Document: Data Sheet Version: 1 Status: actual Author: bs Date: 03-09-24 Approved: rs Date: 03-09-24 File: PC	Magnetic Speed Sensor MSP 6723C With Plug and Cable	 HUEGLI TECH LTD SWITZERLAND Tel.: +41-62-916 50 30 Fax. +41-62-916 50 35
---	--	--	--

Quick information:

Thread size	: M 16 x 1.5
Material	: Aluminium galvanized, nut stainless steel
Useable thread length	: 70 mm
Pickup length	: 79 mm
Cable length without plug	: 64 mm
Complete length	: 162 mm
Plug connection	: US Automotive connection
Identification mark	: On the magnetic side only: MSP 6723
Speed range	: Up to 7500 Hz continuous



Magnetic Speed Sensor with US Automotive Connector

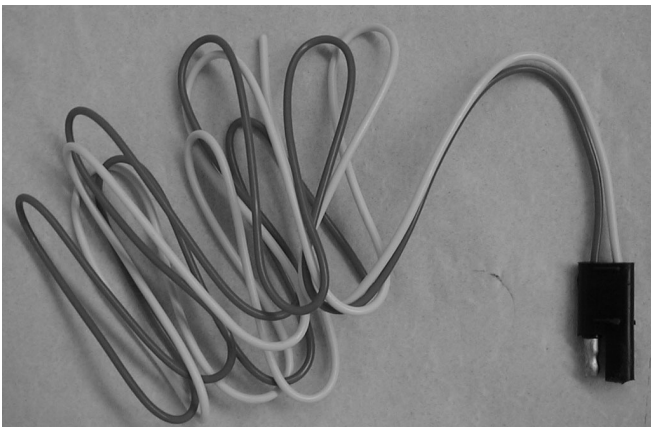

CH 1206, Cable with US Automotive Connector






Engine
Governing
Systems

Document: Data Sheet
Version: 1
Status: actual
Author: bs **Date:** 03-09-24
Approved: rs **Date:** 03-09-24
File: PC

Magnetic Speed Sensor MSP 6723C With Plug and Cable



HUEGLI TECH LTD
SWITZERLAND
Tel.: +41-62-916 50 30
Fax: +41-62-916 50 35

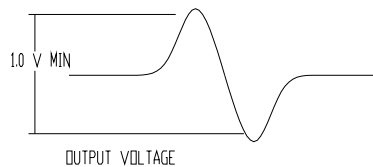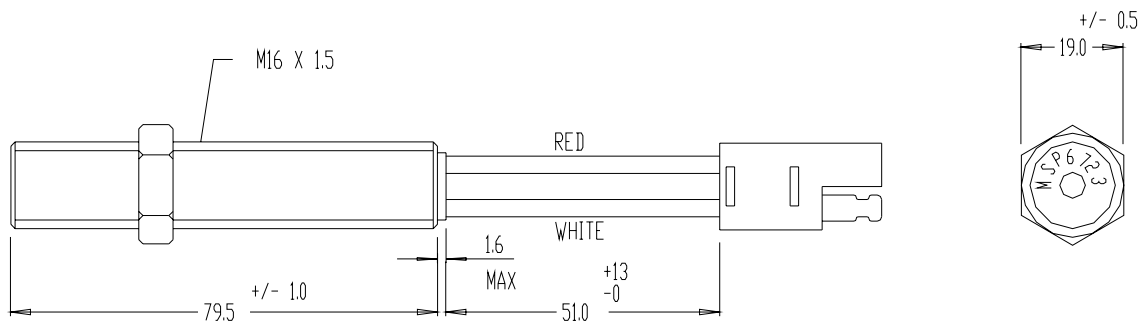

GAC P/N: CH-1206

SPECIFICATIONS

- RESISTANCE: 180 OHMS $\pm$ 20% @ 78° F
- OUTPUT VOLTAGE: 1.0 V P-P UNDER THE FOLLOWING CONDITIONS
 - AIRGAP: 1.4mm
 - TEST WHEEL: MODULE 3 (8.5 PITCH)
 - SURFACE SPEED: 200 Hz (TOOTH FREQUENCY)
 - LOAD: 20 K OHMS
- TEMPERATURE RANGE: -65° F - 225° F (OPERATING)
-100° F - 225° F (STORAGE)

POS.	DESCRIPTION		QTY.	DRAWING NO.	REV
			MATERIAL		
			FINISH		
		MAGNETIC SPEED SENSOR			
DRAWN	CDM	DATE	9-2-94	SIZE	DRAWING
CHECKED		DATE			MSP6723C
USED ON		NEXT ASSY.	SCALE	1:1	SHEET OF
					A

Jeenda Machinery Co.,Ltd.

TEL:+86 577 88955573 FAX:+86 577 56667563

EMAIL:parts@powergensetparts.com WEB: <http://www.powergensetparts.com>

ADD:No.1402 Unit 15 Group 2 Xintianyuan, Xincheng Wenzhou 325000,Zhejiang China

Professional manufacturer of Stamford AVR, Leroysoner AVR R250,Marthon AVR, Siemens AVR,Deep Sea Starting System,Cumminsspeed control,Load Sharing module,CumminsActuators,GAC Actuators,Caterpillar AVRVR6,Mecc AlteAVR SR7,rectifierSSAYEC432,Diode Bridge330-25777 ,Blaser AVR AVC63-7,Kutai AVR EA05A,SS053,MARELLI AVR M16FA655A,DSE5120,DSE5220,DSE5110,DSE501K,DSE704,.etc.